

# Central<sup>TM</sup> Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA  
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

BSV15, -10, -16  
BSV16, -10, -16  
BSV17, -10,

PNP SILICON TRANSISTORS

JEDEC TO-39 CASE

## DESCRIPTION

The CENTRAL SEMICONDUCTOR BSV15 series types are PNP Silicon Epitaxial Transistors designed for general purpose amplifier and switching applications.

## MAXIMUM RATINGS (T<sub>A</sub>=25°C)

	SYMBOL	BSV15	BSV16	BSV17	UNITS
Collector-Base Voltage	V <sub>CB0</sub>	40	60	90	V
Collector-Emitter Voltage	V <sub>CEO</sub>	40	60	80	V
Emitter-Base Voltage	V <sub>EBO</sub>		5.0		V
Collector Current	I <sub>C</sub>		1.0		A
Collector Current (Peak)	I <sub>CM</sub>		2.0		A
Base Current (Peak)	I <sub>BM</sub>		200		mA
Power Dissipation (T <sub>C</sub> =25°C)	P <sub>D</sub>		5.0		W
Power Dissipation	P <sub>D</sub>		0.8		W
Operating and Storage					
Junction Temperature	T <sub>J</sub> , T <sub>stg</sub>		-65 to +200		°C
Thermal Resistance	θ <sub>JC</sub>		35		°C/W
Thermal Resistance	θ <sub>JA</sub>		219		°C/W


## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	BSV15		BSV16		BSV17		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	
I <sub>CB0</sub>	V <sub>CB</sub> =Rated V <sub>CEO</sub>		100		100		100	nA
I <sub>CB0</sub>	V <sub>CB</sub> = Rated V <sub>CEO</sub> , T <sub>A</sub> =150°C		50		50		50	μA
I <sub>EBO</sub>	V <sub>EB</sub> =4.0V		50		50		50	nA
V <sub>CE(SAT)</sub>	I <sub>C</sub> =500mA, I <sub>B</sub> =25mA		1.0		1.0		1.0	V
V <sub>BE(ON)</sub>	V <sub>CE</sub> =1.0V, I <sub>C</sub> =100mA		1.0		1.0		1.0	V
V <sub>BE(ON)</sub>	V <sub>CE</sub> =1.0V, I <sub>C</sub> =500mA	0.7	1.4	0.7	1.4	0.7	1.4	V
f <sub>T</sub>	V <sub>CE</sub> =10V, I <sub>C</sub> =50mA, f=100MHz	50		50		50		MHz
C <sub>c</sub>	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1.0MHz		30		30		25	pF
C <sub>e</sub>	V <sub>EB</sub> =0.5V, I <sub>C</sub> =0, f=1.0MHz	180 TYP		180 TYP		180 TYP		pF
t <sub>on</sub>	I <sub>C</sub> =100mA, I <sub>B1</sub> =I <sub>B2</sub> =5.0mA		500		500		500	ns
t <sub>off</sub>	I <sub>C</sub> =100mA, I <sub>B1</sub> =I <sub>B2</sub> =5.0mA		650		650		650	ns

SYMBOL	TEST CONDITIONS	BSV15-10 BSV16-10 BSV17-10		BSV15-16 BSV16-16		UNITS
		MIN	MAX	MIN	MAX	
h <sub>FE</sub>	V <sub>CE</sub> =1.0V, I <sub>C</sub> =100μA	20		30		
h <sub>FE</sub>	V <sub>CE</sub> =1.0V, I <sub>C</sub> =100mA	63	160	100	250	
h <sub>FE</sub>	V <sub>CE</sub> =1.0V, I <sub>C</sub> =500mA	25		35		

(See Reverse Side)

# JEDEC TO-39 CASE - MECHANICAL OUTLINE

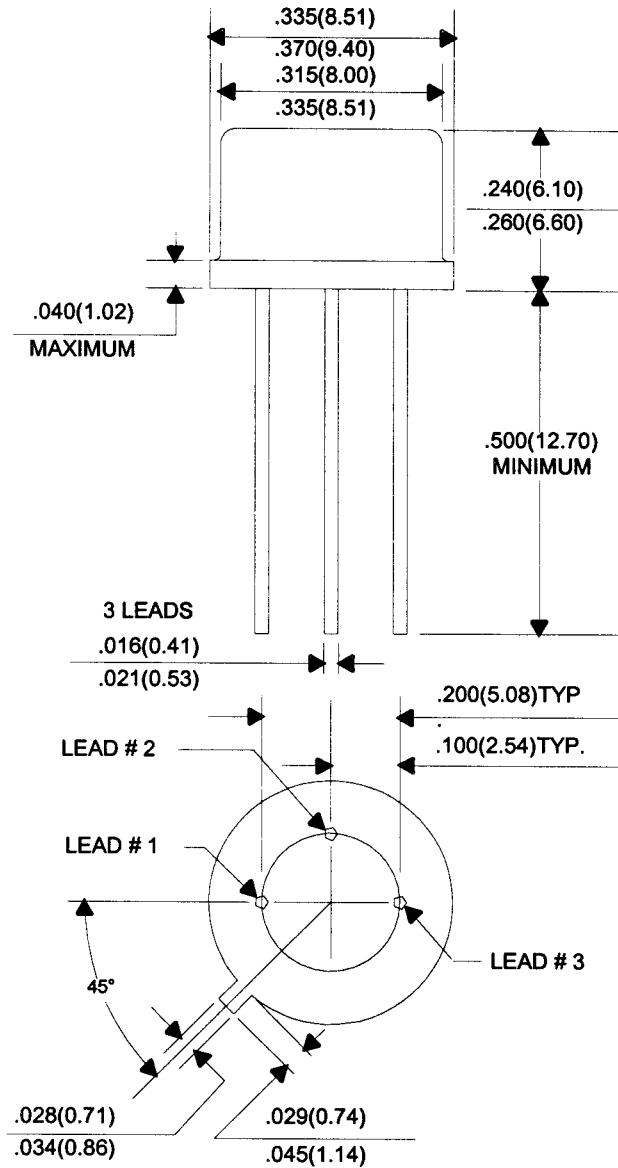

All Dimensions in Inches (mm).

Lead Code:

1. Emitter
2. Base
3. Collector

**Central**<sup>™</sup>  
**Semiconductor Corp.**

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)